


# ARSOPUMP

## PPDM 25

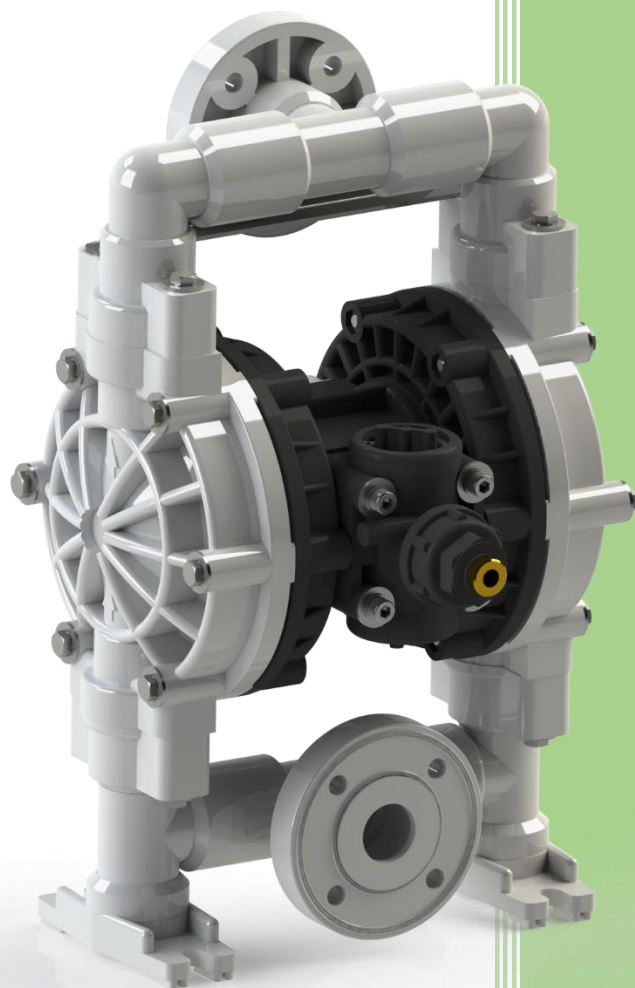

ARSOPUMP

Orce Nikolov 174

1000 Skopje, Macedonia

+389 75 428 042

[info@arsopump.com](mailto:info@arsopump.com)

[www.arsopump.com](http://www.arsopump.com)

# ARSOPUMP

## PPDM 25

air-operated double diaphragm pump

- high quality production, metal parts hardened at 70 HRB
- ideal for aggressive, abrasive and viscous fluids
- dry-run indefinitely without suffering any damage
- blocked discharge will not damage the pump
- lube free operation
- no maintenance
- no risk of explosion



### Performance:

Max flow rate	4 500 L/h
Max discharge pressure	4 bar
Max air supply pressure	6 bar
Suction lift	5.4 m Dry
	9.2 m Wet
Max size solids	3.5 mm
Max fluid temperature	85 °C

### Dimensions:

Height	386 mm
Width	229 mm
Depth	250 mm
Fluid inlet	22 mm
Fluid outlet	22 mm
Air Inlet	3/8"
Est. ship weight	4.5 kg

### Wetted elastomers:

NBR
EPDM
NR
VITON

### Wetted pump materials:

PP
PTFE

### References:

Sun Chemical Skopje, Duropack AD Skopje, Alkaloid AD Chemicals, Alkaloid AD Cosmetics, Wabtec MZT Skopje, Pivara Skopje AD, Coca-Cola Hellenic Skopje, Prilep Brewery AD, Cementarnica USJE AD, Fobas Company, Androsfarm etc.